

Kecil. Tangguh.



S1 mini
Radio Komunikasi
Bisnis Dua Arah



Ringan
Hanya 48
gram



Waktu Kerja
hingga 17 Jam



Earphone
Standar



Panggilan bebas
genggam



Pengisian daya
cepat Type-C



Channel copy



Hytera Radio
app
management




Skenario Aplikasi



Restoran



Café

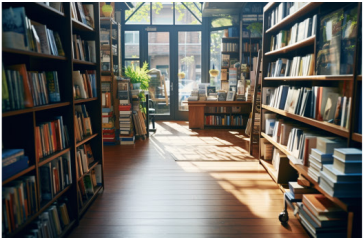

Toko Buku



Salon Kecantikan

Spesifikasi

Informasi Umum	
Model	HYT-S10/HYT-S10 LF
Rentang Frekuensi	400-440 MHz, 430-470 MHz/446 MHz
Analog/Digital	Analog
Kapasitas Channel	16
Kapasitas Zona	1
Tegangan Operasi	3.8V (Rated)
Baterai	750mAh Li-Polymer (tanam)
Daya ahan Baterai (5/5/90 Siklus Kerja, Daya Pancar)	Dengan Earphone: 16 hrs (1W)/18 hrs (0.5W)
Dimensi (TxLxK)	99*30*16mm (tanpa sabuk Klip)
Berat (Dengan Baterai dan Antena)	49 g
Layar	0.88 inch
BT	BLE (Hanya Data) 5.1
Receiver	
Sensitifitas	0.14μV
Ukuran Daya Output Audio	0.5W
Pemancar	
Daya Output	400-440 MHz, 430-470 MHz: 1W 446 MHz: 0.5W
Respon Audio	+1 to -3dB
Distorsi Audio	≤3%
Lingkungan Penggunaan	
Suhu Pengoperasian	-10°C~ +55°C
Suhu Penyimpanan	-30°C ~ +70°C
Anti-Static	±4kV (Kontak) ±8kV (Udara)



PT. Hytera Communications Indonesia

Tel:+62212952 7172

Email: info@hytera.co.id

Website: www.hytera.com/id

Address: The East Building, 38th floor, Mega Kuningan, Jakarta 12950, Indonesia

Aksesoris

● Standar ● Opsional



Earphone



Tali



Kabel Pengisian
Daya Tipe-C



Pengisian daya 16 slot



Adapter





Facebook



Instagram



LinkedIn



Youtube

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Communications Corp., Ltd.
©2024 Hytera Communications Corp., Ltd. All Rights Reserved.